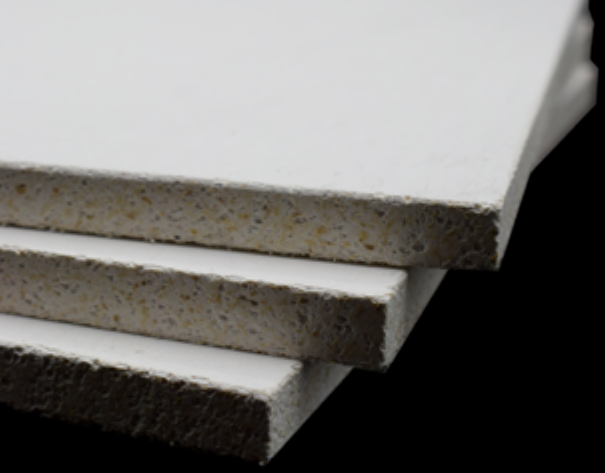

Magply

A1 RATED PATTRESS BOARD

EUROCLASS A1

Magply board (18mm & 20mm) offers a tried and tested alternative to plywood & OSB in Pattress applications within dry lining in both ceilings and walls. With changes in the construction industry and fire regulations you can be assured that Magply ticks all the boxes offering a lightweight robust building board with superb screw pull out results and the highest fire performance guaranteed to take the weight of everyday items in today's construction industry.

A1
EUROCLASS A1
NON-COMBUSTIBLE
BOARD

- REACTION TO FIRE A1
- EASY TO CUT / SCORE AND SNAP
- HIGH SCREW PULL OUT STRENGTH
- SAFE LOAD FIXINGS UP TO 1.5kN PER m^2
- CONFORMS TO BS 5237-2 1982
- RACK TESTING TO BS EN 594:2011
- FIRE TESTED TO BS 476: PART 6&7 + A1
- SUITABLE ABOVE 18 METRES

FOR MORE INFORMATION VISIT

magply.co.uk

+44 (0) 1621 776 252
sales@magply.co.uk

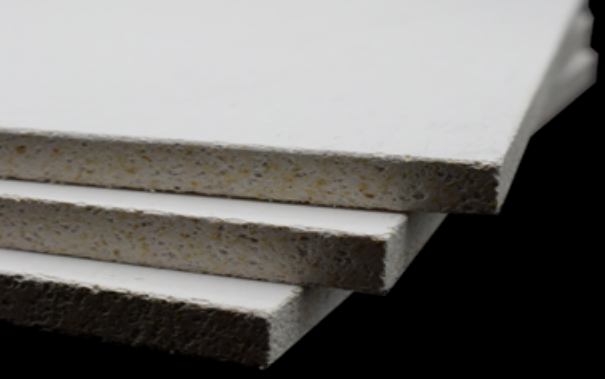

Magply

A1 RATED PATTRESS BOARD

TESTING DATA

Fire
BS EN 476 (PARTS 6&7) Class1
Euro Class EN13501 A1 Non Combustible
(LGS) 12MM - 154 Minutes
(Timber) 12MM - 132 Minutes
Board Testing
BS EN 12467
BSI Pass 670
BBA Certified
Performance
Racking:BS EN 594:2011
Sound : BS IOS 10140
Pull out / Pull through
Pull through : EAD090062-00-04

On site testing
Weight per fixing 18mm / 20mm - 50kg
Pull out tested with

- Ejot
- Evolution fixings
- Dewalt Fixings
- Fischer Fixings

PULL OUT TESTING
Magply 4.40 KN
Plywood 2.20 KN
OSB 1.20 KN
Tested with evolution screws A41S / BMDW / WHX
Tested with Fischer power fast screws
Test report : 7485-20-000493-01-1(evolution)
Test report : UK204414 (Lucideon)

A1
EUROCLASS A1
NON-COMBUSTIBLE
BOARD

REACTION TO FIRE A1

EASY TO CUT / SCORE AND SNAP

HIGH SCREW PULL OUT STRENGTH

SAFE LOAD FIXINGS UP TO 1.5kN PER m^2

CONFORMS TO BS 5237-2 1982

RACK TESTING TO BS EN 594:2011

FIRE TESTED TO BS 476: PART 6&7 + A1

SUITABLE ABOVE 18 METRES

FOR MORE INFORMATION VISIT
magply.co.uk

+44 (0) 1621 776 252
sales@magply.co.uk